


可拆板式换热器
GASKETED
PLATE HEAT EXCHANGER

板片材质：304、316L
垫片材质：NBR、EPDM、F26、FTP

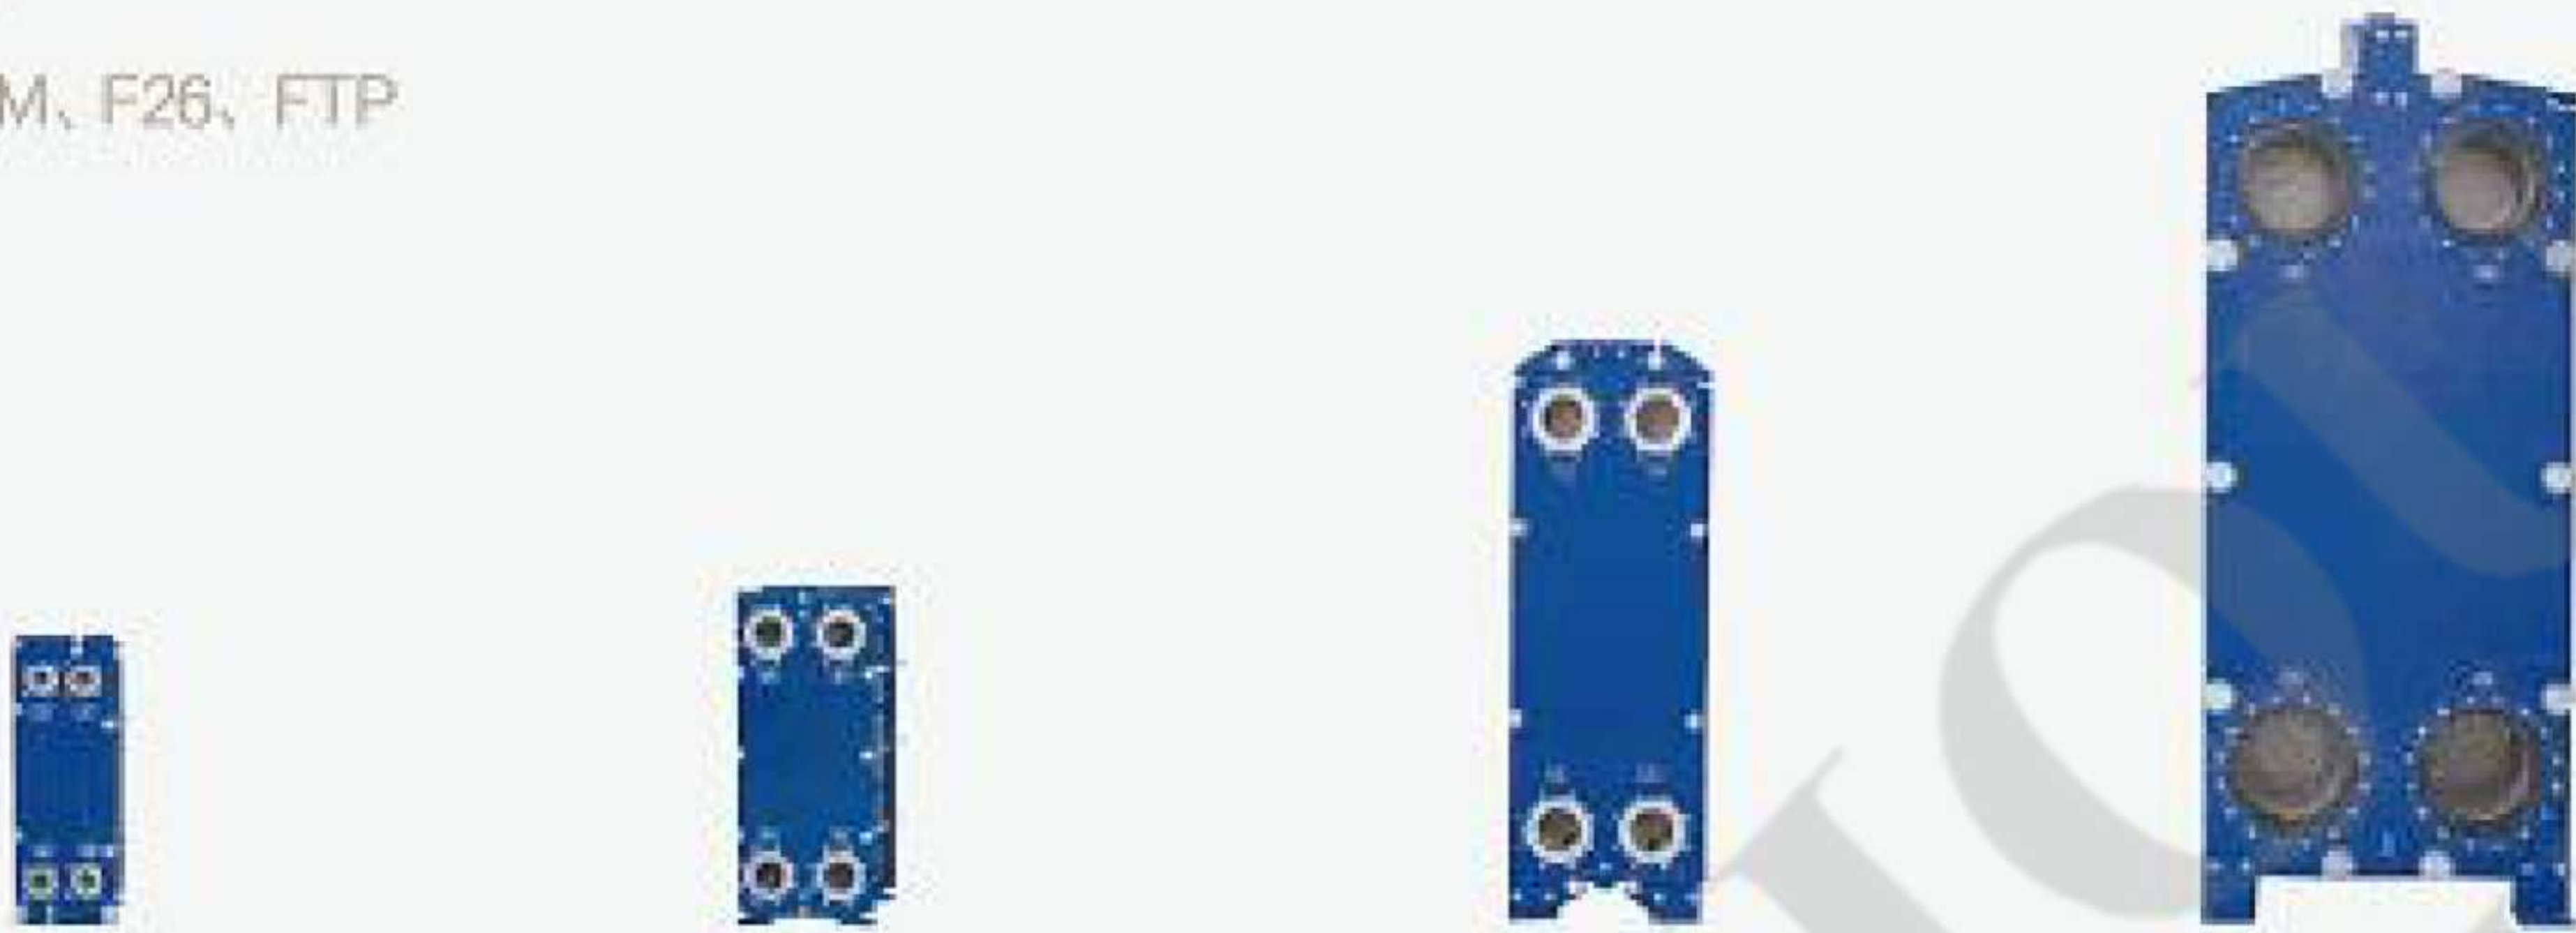

型号	夹紧距 (mm)	宽度 (mm)	接管横向中心距 (mm)	长度 (mm)	接管纵向中心距 (mm)	底端中心至地面高度 (mm)	最大安装尺寸 (L)	接口通径 (mm)	最大片数	最大流量 (m³/h)	设计压力 (Mpa)
B30B	N(2.5+X)	180	60	480	357	62	500	32	95	18	1.0
S60H	N(4+X)	400	203	704	380	188	1200	65	147	50	1.6
B60B/B60H	N(2.0+X)/N(3.0+X)	320	140	920	640	140	1200	50	250/203	36	1.6
K60B/K60H	N(2.0+X)/N(3.0+X)	320	140	950	689	130	1200	50	250/203	36	1.6
B100B/B100H	N(2.55+X)/N(3.95+X)	470	225	1069	719	183/200	1600	100	278/180	140	1.0/1.6/2.5
K100B/K100H	N(2.55+X)/N(3.95+X)	470	225	1099	763	176/193	1600	100	278/180	140	1.0/1.6/2.5
S200H	N(4+X)	800	363	1405	698	360	3000	200	400	600	1.6
L100B	N(2+X)	480	225	1888	1338	262	3000	100	400	140	1.0
K150B/K150H	N(3.95+X)	610	298	1616	1095	275	3000	150	600	360	1.0/1.6/2.5
B150B/B150H	N(2.5+X)/N(3.95+X)	610	298	1815	1294	275	3000	150	600	360	1.0/1.6/2.5
B200H	N(4+X)	780	353	2260	1478	380	3000	200	400	600	1.0/1.6
B250B	N(2.5+X)	920	439	2895	1939	435	3000	250	500	750	1.0/1.6/2.5
B350B	N(3.3+X)	1150	596	2882	1842	470	4800	350	700	997	1.0/1.6

钎焊板式换热器
BRAZED
PLATE HEAT EXCHANGER



型号	宽度	接管横 向 中 心 距 (mm)	接管纵 向 中 心 距 (mm)	长度(mm)	厚度(mm)	重量(mm)	设计压力 (Mpa)	最大流量 (L)	设计温度 (°C)
ZL14	76	42	172	206	9+2.3N	0.6+0.056N	1/3/4.5	8m3/h	-196-225
ZL20B	78	42	282	318	9+2.3N	0.9+0.088N	3/4.5	8m3/h	-196-225
ZL20A	95	40	269	325	9+1.58N	0.9+0.088N	3/4.5	8m3/h	-196-225
ZL26	111	50	250	310	10+2.36N	1.3+0.12N	3/4.5	18m3/h	-196-225
ZL30	124	70	250	304	13+2.4N	2.2+0.146N	3/4.5	18m3/h	-196-225
ZL52A	111	50	466	525	10+2.35N	1.9+0.215N	3/4.5	18m3/h	-196-225
ZL52B	111	50	466	525	10+2.35N	1.9+0.213N	3/4.5	18m3/h	-196-225
ZL62A	119	63	470	526	10+2.35N	2.4+0.225N	3/4.5	18m3/h	-196-225
ZL62B	119	63	470	526	10+2.35N	2.4+0.223N	3/4.5	18m3/h	-196-225
ZL95A	191	92	519	616	11+2.72N	6+0.415N	3/4.5	42m3/h	-196-225
ZL95B	191	92	519	616	11+2.72N	6+0.413N	3/4.5	42m3/h	-196-225
ZL120A	246	174	456	528	10+2.36N	7+0.472N	3/4.5	42m3/h	-196-225
ZL120B	246	174	456	528	10+2.36N	7+0.472N	3/4.5	42m3/h	-196-225
ZL200A	321	188	603	738	13+2.7N	13+0.74N	1.5/2.1/3	100m3/h	-196-225
ZL200B	321	188	603	738	13+2.7N	13+0.73N	1.5/2.1/3	100m3/h	-196-225