



L型联轴器

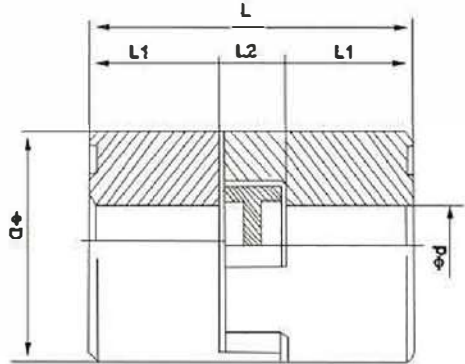


型号 Coupling Type	扭矩 Torque		最高转速 Max. Rpm	外径 D	壁厚 L	轴径 L1		轴径 L2		轴孔径 Bore d	惯性矩 Moment of Inertia Gd ² (kg·m ²)	重量 Weight (kg)
	最大 Max.	最小 Min.				最小 Min.	最大 Max.	最小 Min.	最大 Max.			
L-035	0.15	0.05	6,000	16.1	20.15	6.68	6.77	4	8	0.1	0.02	
L-050	0.45	0.15	4,500	27.6	42.55	15.64	11.25	6	16	1	0.14	
L-070	0.9	0.3	3,600	34.28	49.92	19.3	11.3	6	20	3.3	0.25	
L-075	1.5	0.5	3,600	44.6	52.88	20.5	11.74	8	26	9.1	0.45	
L-090	2.4	0.8	3,000	53.58	53.22	20.7	11.8	10	28	15	0.66	
L-095	3	1	3,000	53.58	62.36	25.22	11.9	10	28	17	0.78	
L-099	6	2	3,000	64.55	76.47	29.72	17.01	12	36	42	1.35	
L-100	7.5	2.5	3,000	64.55	86.47	34.72	17.01	12	36	43	1.53	
L-110	15	5	25,00	84.28	106.32	43.08	20.14	12	38	147	3.30	
L-150	30	10	25,00	95.28	112.95	44.6	23.73	16	46	258	4.48	

KC型联轴器

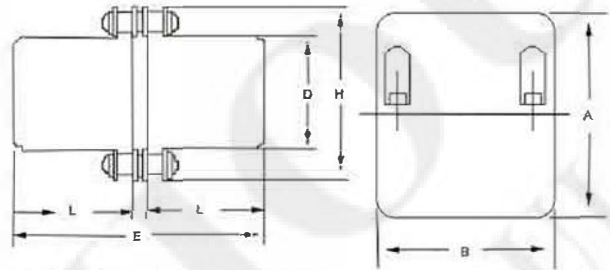


Type 型号	Coupling 联轴器								Casing 外壳		
	Bore Diameter 孔径		E	L	D	H	推荐马力 (HP)	重量 (kgs)	A	B	重量 (kgs)
	最小 Min.	最大 Max.									
KC4012	10	22	80	36	35	61	1	0.8	75	75	0.3
KC4016	12	30	80	36	50	77	2-3	1.4	92	75	0.4
KC5016	14	40	100	45	60	96	5	2.6	111	85	0.6
KC5018	16	45	100	45	70	106	7.5-10	3.5	122	85	0.7
KC6018	16	55	120	54	85	128	15-20	6.2	142	106	1.0
KC6022	18	75	120	54	110	152	30	9.8	187	108	1.2
KC8018	20	78	150	67	115	170	40	13.9	186	130	2.3
KC8022	20	95	150	67	140	202	50	20.2	220	130	2.4
KC10020	25	110	201	91	160	228	75	34	248	152	3.2
KC12018	30	120	261	119	170	252		51	305	180	5.6
KC12022	30	150	261	119	210	300		66	355	180	7.1

NM型联轴器




型号 Coupling NM Type	扭矩 Torque		最高转速 Max. speed rpm	孔径 Bore diameter		凸台直径 Boss diam (D)	外径 Outside diam. (OD)	长度 Length (L)	间距公差 Space & perm. Tolerance	重量 approx. Weight (kgs)
	正常 Normal (Kg·m)	最大 Max. (Kg·m)		最小 Min.	最大 Max.					
50	1.3	2.3	13,500	7	19	33	50	25	2.0 ± 0.5	0.48
67	2.2	4	10,000	8	28	46	67	30	2.5 ± 0.5	1.02
82	5.0	9	8,000	10	32	53	82	40	3.0 ± 1.0	1.88
97	10.5	19	7,000	10	42	69	97	50	3.0 ± 1.0	3.54
112	16.7	30	6,000	14	48	79	112	60	3.5 ± 1.0	5.40
128	26.7	48	5,000	18	55	90	128	69	3.5 ± 1.0	8.10
148	41.7	75	4,500	22	65	107	148	80	3.5 ± 1.0	13.50
168	68.5	125	4,000	28	75	124	168	90	3.5 ± 1.5	19.30
194	112.0	200	3,500	32	85	140	198	98	3.5 ± 1.5	26.30
214	167.0	300	3,000	45	95	158	218	112	4.0 ± 2.0	35.70

FL型联轴器

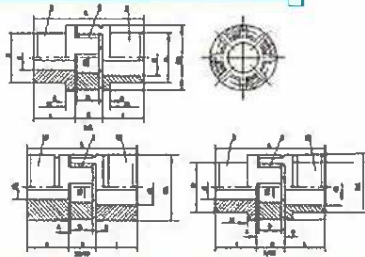


Type	Style	Prepared	Form										Dimensions(mm)						Min. Weight (kg)
			1	1a	d	d1	1	E	S	b	L	M	OH	D	dH				
			min	min	min	min	min	min	min	min	min	min	min	min	min				
铝合金 Aluminium Diecasting(Al-D)																			
FL14	1a/1a					4	16	11	13	1.5	10	35		30			10	0.048	
Steel-NoduLar Iron steel																			
FL19/24	1a/1a					6	24	25	16	2	12	66		40			18	0.328	
FL24/28	1a/1a					8	28	30	18	2	14	78		55			27	0.66	
FL28/38	1a/1a					10	38	35	20	2.5	15	90		65			30	1.16	
FL38/45	1/1a	11	12	38	38	45	45	24	3	18	114	37	80	66	38		2.27		
FL42/55	1/1a	13	14	42	42	55	50	26	3	20	126	40	95	75	46		3.57		
FL48/60	1/1a	14	15	48	48	60	56	28	3.5	21	140	45	105	85	51		4.8		
FL55/70	1/1a	18	20	55	55	70	65	30	4	22	160	52	120	98	60		7.37		
FL65/75	1/1a	20	22	65	65	75	75	35	4.5	26	185	61	135	115	68		10.89		
FL75/90	1/1a	28	30	75	75	90	85	40	5	30	210	69	160	135	80		17.73		
FL90/100	1/1a	38	40	90	90	100	100	45	5.5	34	245	81	200	160	100		29.6		
FL38	1/a	11	12	38				45	24	3	18	114	37	80	66	38	2.08		
FL42	1/1a	13	14	42				50	26	3	20	126	40	95	75	46	3.21		
FL48	1/1a	14	15	48				56	28	3.5	21	140	45	105	85	51	4.41		
FL55	1/1a	18	20	55				65	30	4	22	160	52	120	98	60	6.64		
FL65	1/1a	20	22	65				75	35	4.5	26	185	61	135	115	68	10.13		
FL75	1/1a	28	30	75				85	40	5	30	210	69	160	135	80	16.03		
FL90	1/1a	38	40	90				100	45	5.5	34	245	81	200	160	100	27.5		

NL型联轴器

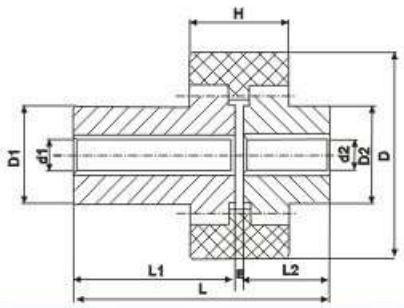


型号	公称扭矩 Tn (N.m)	许用转速 n (r/min)	轴孔直径 d1 d2		主要尺寸 (mm)							最大尺寸偏差			许用扭矩 (KgCm2)	重量 (Kg)
					轴孔长度 L1 L2	L	D	D1	D2	E	L4	轴向 (mm)	径向 (mm)	角度 α°		
NL1	40	6000	68 10	16 20	37 45	40	26	4	34	2	±0.3	1°	0.25	0.85		
			12 14	25 32	55 69											
NL2	100	6000	10 12 14 22	25 32	57 71	42	36	4	40	2	±0.4	1°	0.92	1.7		
			16 18 20 24	42 52	91 111											
NL3	160	6000	20 22 24	52 62	113	66	44	4	46	2	±0.4	1°	3.10	2.6		
			25 28		133											
NL4	250	6000	28 30 32	62 82	129	83	58	4	48	2	±0.4	1°	8.69	3.6		
			35 38		169											
NL5	315	5000	32 35 38	82 112	169	93	68	4	50	3	±0.4	2°	14.28	5.5		
			40 42		229											
NL6	400	5000	40 42 45	82 112	230	100	68	4	52	3	±0.4	2°	18.34	6.8		
			48													
NL7	630	3600	45 48 50	82 112	229	115	80	4	60	3	±0.6	2°	56.5	9.8		
			55													
NL8	1250	3600	48 50 55	112 142	229	140	96	4	72	3	±0.6	2°	98.55	26.5		
			60 63 65		289											
NL9	2000	2000	60 63 65	142 172	295	175	124	6	93	4	±0.7	2°	370.5	37.6		
			70 71 75 80		351											
NL10	3150	1800	70 71 75 80	142 172	292 352	220	157	8	110	4	±0.7	2°	1156.8	55		
				212	432											

螺旋定位联轴器

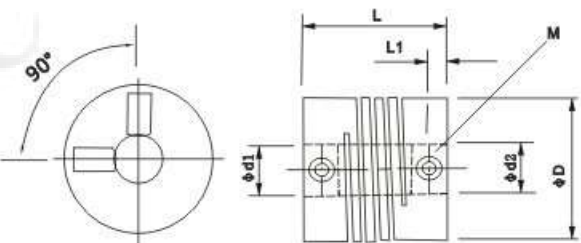


型号	D	L	d1、d2轴径	L1	M	拧紧力矩 (N.m)
YFT3-15.5	15.5	23	3 4 5	3	M3	0.7
YFT3-17.5	17.5	23	4 5 6	3	M4	0.7
YFT3-19.5	19.5	24.5	5 6 6.35 8	3	M4	0.7
YFT3-25.4	25.4	24.5	6 6.35 8 10	3.8	M4	1.7
YFT3-28.6	28.6	28.6	6.35 8 10 12 12.7	4	M4	1.7
YFT3-38.1	38.1	38.1	8 10 12 12.7 14 15	5	M5	2
YFT3-42	42	50	10 12 14 15 16 18	7.8	M6	4.5
YFT3-50	50	50	14 15 16 18 19 20	7.8	M6	7

FCL型联轴器

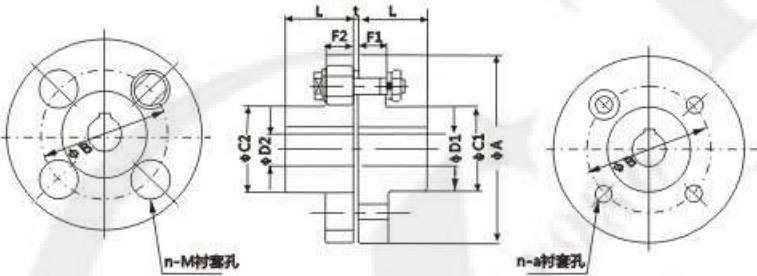


型号	A	pilot bore	I	C		B	最大孔径				F	a	M	t	最高转速 (rpm)	最大扭矩 (N.m)	重量 (kg)
				C1	C2		D1	D2	F1	F2							
FCL-90	90	-	28	35.5	35.5	60	20	20	14	14	4	8	19	3	4000	4	1.54
FCL-100	100	-	35.5	42.5	42.5	67	25	25	16	16	4	10	23	3	4000	10	2.32
FCL-112	112	-	40	50	50	75	28	28	16	16	4	10	23	3	4000	16	3.09
FCL-125	125	-	45	56	50	85	32	28	18	18	4	14	32	3	4000	25	4.18
FCL-140	140	-	50	71	63	100	38	35	18	18	6	14	32	3	4000	50	5.81
FCL-160	160	-	56	80	80	115	45	45	18	18	8	14	32	3	4000	110	8.24
FCL-180	180	-	63	90	90	132	50	50	18	18	8	14	32	3	3500	157	11.10
FCL-200	200	18	71	100	100	145	56	56	22.4	22.4	8	20	41	4	3200	245	16.60
FCL-224	224	18	80	112	112	170	63	63	22.4	22.4	8	20	41	4	2850	392	22.00
FCL-250	250	20	90	125	125	180	71	71	28	28	8	25	51	4	2550	618	32.40
FCL-280	280	30	100	140	140	200	80	80	28	40	8	28	57	4	2300	980	45.00
FCL-315	315	32	112	160	160	236	90	90	28	40	10	28	57	4	2050	1568	58.00

螺旋夹紧联轴器

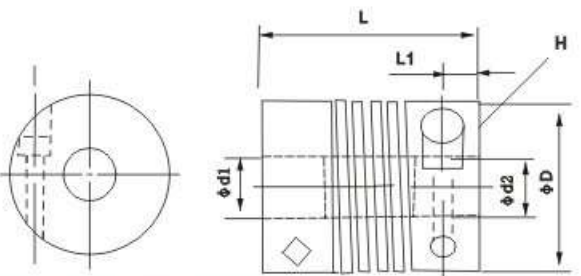


型号	D	L	d1、d2轴径	L1	M	拧紧力矩 (N.m)
YFT4-19	19	23	3 4 5 6 6.35	3	M2.5	1
YFT4-25.4	25.4	31.8	4 5 6 6.35 8 10	3	M3	1.5
YFT4-28.6	28.6	38.1	6 6.35 8 10 12 12.7	2.5	M4	2
YFT4-32	32	40	6.35 8 10 12 12.7 15	3	M4	4
YFT4-38.1	38.1	41.3	8 10 12 12.7 14 15 19	3.8	M5	4.5
YFT4-42	42	50	10 12 14 15 18 19 20 21	4	M6	6.8
YFT4-50.8	50.8	50.8	12 14 15 16 18 19 21 25	5	M6	7.5

单节膜片联轴器

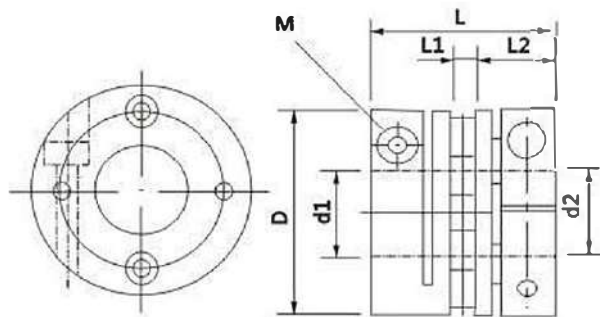


型号	D	L	d1、d2轴径	L1	L2	M	拧紧力矩 (N.m)
YFT1-26	26	24	5 6 6.35 7 8 9 10	2.7	10.65	M2.5	1.2
YFT1-34	34	28	7 8 9 10 11 12 14	3.6	12.2	M3	1.7
YFT1-34A	34	33	7 8 9 10 11 12 14	3.6	12.2	M4	1.7
YFT1-39	39	33.5	8 10 11 12 14 15 16	4.5	14.5	M4	2.5
YFT1-44	44	33.5	11 12 14 15 16 18 19 20	4.5	14.5	M4	5.5
YFT1-56	56	45	14 15 16 18 19 20 22 24	5.2	19.9	M5	8.6
YFT1-68	68	54	19 20 22 24 30 35	5.8	24.1	M6	15
YFT1-82	82	68	24 25 28 30 35 38 40	8	30	M8	18

平行定位联轴器

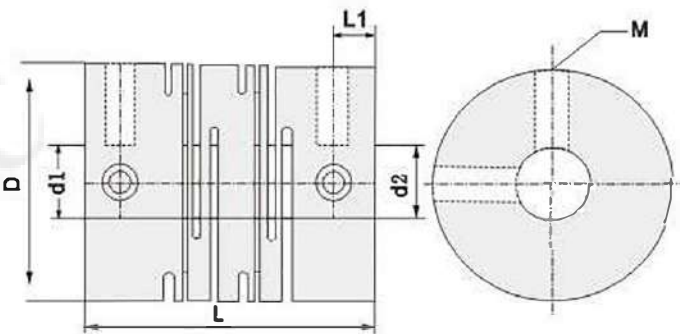



型号	D	L	d1、d2轴径	L1	M	拧紧力矩 (N.m)
YFT5-15.5	16	23	3 4 5	3	M3	0.7
YFT5-17.5	17.5	23	4 5 6	3	M3	0.7
YFT5-19.5	19.5	24.5	6 6.35 8	3	M3	0.7
YFT5-25.4	25	25.4	6.35 8 10	3.8	M4	1.7
YFT5-28.6	28.6	28.6	6 6.35 8 10 12 12.7	4	M4	1.7
YFT5-38.1	38	38	8 10 12 12.7 14 15	5	M5	2
YFT5-42	42.0	50	10 12 14 15 16 18	7.8	M6	4.5
YFT5-50	50.0	50	14 15 16 18 19 20	7.8	M6	7

双节膜片联轴器

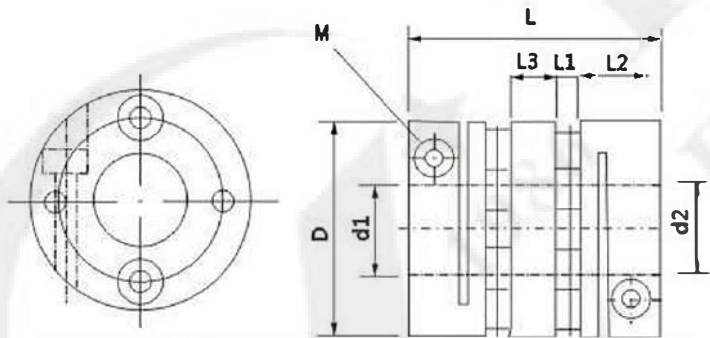


型号	D	L	d1、d2轴径	L1	L2	L3	M	拧紧力矩 (N.m)
YFT2-26	26	33	5 6 6.35 7 8 9 10	2.7	10.65	6.3	M2.5	1.2
YFT2-34	34	41	7 8 9 10 11 12 14	3.6	12.2	9.4	M3	1.7
YFT2-34A	34	45	7 8 9 10 11 12 14	3.6	12.2	9.4	M4	1.7
YFT2-39	39	49	8 10 11 12 14 15 16	4.5	14.5	11	M4	2.5
YFT2-44	44	49	11 12 14 15 16 18 19 20	4.5	14.5	11	M4	5.5
YFT2-56	56	63	14 15 16 18 19 20 22 24	5.2	19.9	12.8	M5	8.6
YFT2-68	68	74	19 20 22 24 30 35	5.8	24.1	14.2	M6	15
YFT2-82	82	98	24 25 28 30 35 38 40	8.0	30	22	M8	18

平行夹紧联轴器

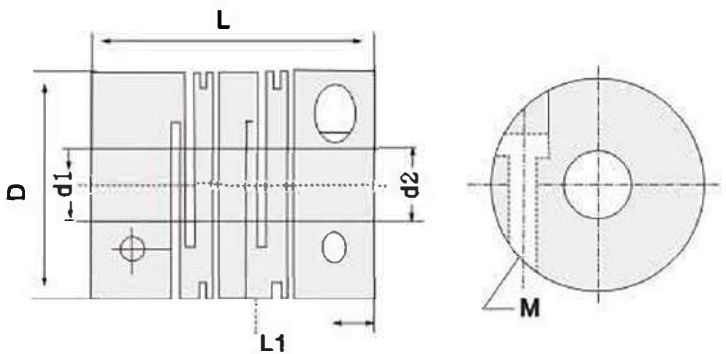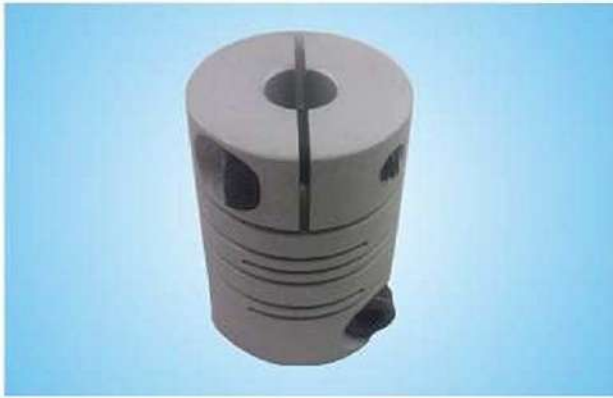


型号	D	L	d1、d2轴径	L1	M	拧紧力矩 (N.m)
YFT6-19	19	28	3 4 5 6 6.35	3	M2.5	1.0
YFT6-25.4	25.4	31.8	4 5 6 6.35 8 10	3	M3	1.5
YFT6-28.6	28.6	38.1	6 6.35 8 10 12 12.7	2.5	M4	2.0
YFT6-32	32	40	6.35 8 10 12 12.7 15	3	M4	4.0
YFT6-38.1	38.1	41.3	8 10 12 12.7 14 15 19	3.8	M5	4.5
YFT6-42	42	50	10 12 14 15 18 19 20 21	4	M6	6.8
YFT6-50.8	50.8	50.8	12 14 15 16 18 19 21 25	5	M6	7.5

梅花定位联轴器

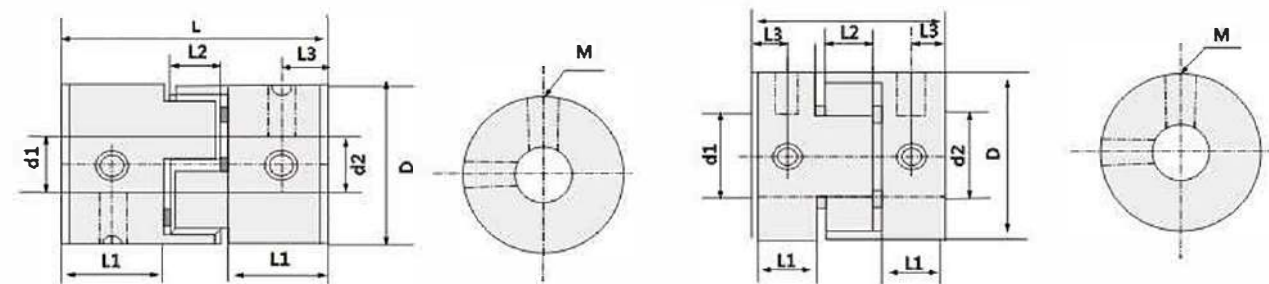

型号	D	L	d1, d2轴径	L1	L2	L3	M	静力矩 (N.m)
YFT7-20	20	30	4 5 6 6.35 7 8 9 10	10	8	5	M4	1.7
YFT7-25	25	30	6 6.35 8 9 10 12	11	10	5.5	M4	2.1
YFT7-30	30	35	8 9 10 12 14	11	10	5.5	M4	2.1
YFT7-40	40	50	8 9 10 12 14 15 18 19	17	12	8.5	M5	4
YFT7-40A	40	66	9 9 10 12 14 15 18 19	25	12	12.5	M5	5.5
YFT7-55	55	78	14 15 19 20 22 25 26	30	14	15	M6	7
YFT7-65	65	90	15 19 20 22 25 28 30	35	15	17.5	M8	15
YFT7-80	80	114	20 22 25 28 30 35 38	46	18	23	M8	25
YFT7-95	95	126	28 30 35 38 40 45 50 55	50	26	20	M8	15
YFT7-105	105	140	30 35 38 40 42 45 58 60	56	28	28	M10	20

梅花夹紧联轴器

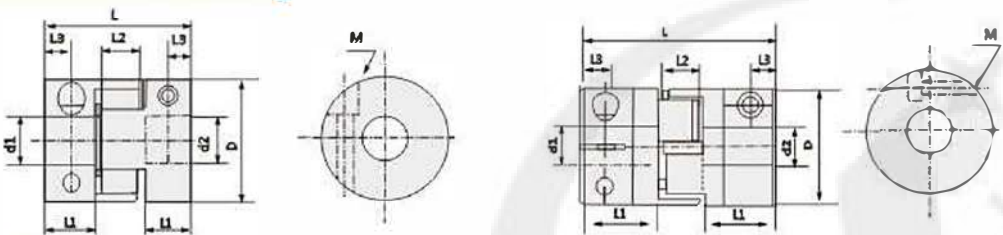

型号	D	L	d1, d2轴径	L1	L2	L3	M	静力矩 (N.m)
YFT8-20	20	30	4 5 6.35 7 8 9 10	10	8	5	M3	1.0
YFT8-25	25	30	6 6.35 8 9 10 12	11	10	5.5	M3	2.1
YFT8-30	30	35	8 9 10 12 14	11	10	5.5	M4	2.5
YFT8-40	40	50	8 9 10 12 14 15 18 19	17	12	8.5	M5	4
YFT8-40A	40	66	9 9 10 12 14 15 18 19	25	12	12.5	M5	6
YFT8-55	55	78	14 15 19 20 22 25 26	30	14	15	M6	8
YFT8-65	65	90	15 19 20 22 25 25 30	35	15	17.5	M8	16
YFT8-80	80	114	20 22 25 28 30 35 38	46	18	23	M6	28
YFT8-95	95	126	28 30 35 38 40 45 50 55	50	26	20	M10	15
YFT8-105	105	140	30 35 38 40 42 45 58 60	56	28	28	M10	20

链轮



规格	3分	4分	5分	6分	1寸
齿数	10齿-50齿	10齿-50齿	10齿-50齿	10齿-50齿	10齿-50齿


1.2、1.5寸各种规格
定做各种非标件链轮

齿轮



型号	1m	1.5m	2m	2.5m	3m	4m	5m	6m	8m	10m	12m
齿数	10至200齿										

电镀手轮

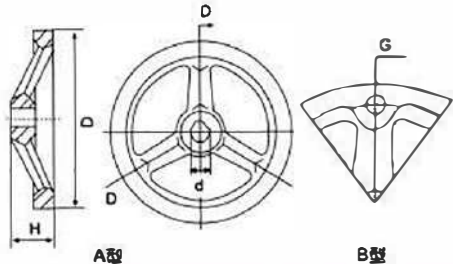

D	d	H
80	10	28
100	12	32
125	12	36
160	15 16	40
200	18 20	45
250	22 25	50
320	25	58
400	28 32	75