




型号说明

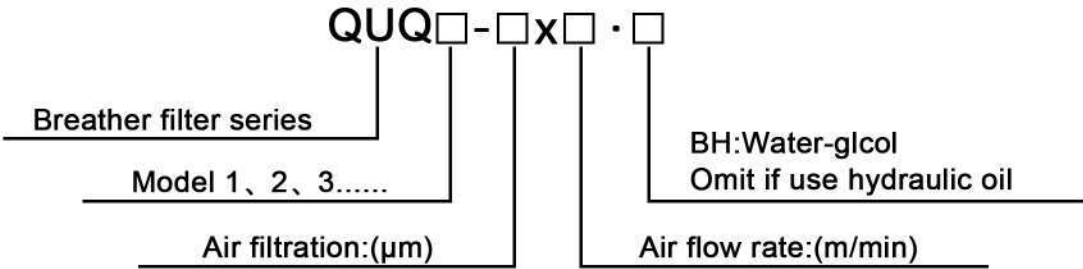


技术参数

Model 型号	QUQ1-* X *	QUQ2-* X *	QUQ2.5-* X *	QUQ3 -* X *	QUQ4 -* X *	QUQ5 -* X *
Air filtration accuracy (μ) 空气过滤精度(μ)	10 20 40					
Air flow (m/min) 空气流量(m/min)	0.25 0.4 1.0	0.63 1.0 2.5	1.0 2.0 3.0	1.0 2.5 4.0	2.5 4.0 6.3	4.0 6.3 10
Temperature adaptation range (°C) 温度适应范围(°C)	-20~+100					
Oil filter mesh hole (mm) 油过滤网孔(mm)	0.5 (Can be selected according to user requirements)					


外形及安装尺寸

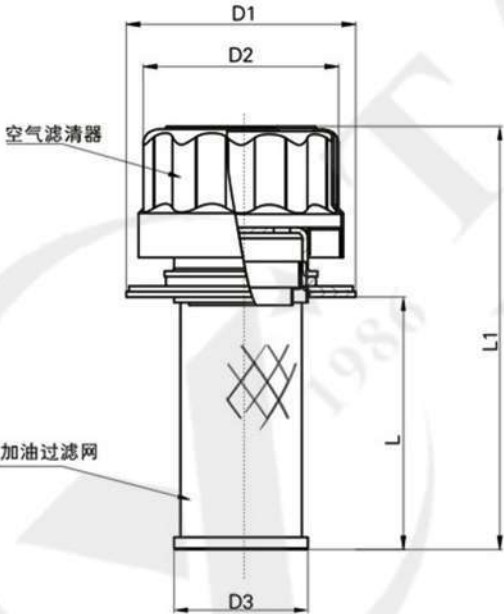

QUQ1



QUQ2-QUQ5




QUQ2.5A-QUQ2.5B

与油箱连接法兰
Connect flange with tank

Model	D	D1	D2	D3	L	L1	Mounting dowels	Φ
QUQ1	Φ41.3	Φ50	Φ44	Φ28	82	134	3— M4X16	Φ4.5
QUQ2	Φ73	Φ83	Φ76	Φ48	98	159	6— M4X8	
QUQ2b	Φ88	Φ97	Φ76	Φ48	98	159	6— M4X8	
QUQ2.5	Φ110	Φ123	Φ113	Φ76	150	239	6— M4X8	
QUQ2.5b	Φ105	Φ123	Φ90	Φ80	185	237	4— M8X12	Φ9
QUQ3	Φ145	Φ160	Φ150	Φ89	195	320	6— M4X12	Φ4.5
QUQ4	Φ250	Φ280	Φ256	Φ153	254	379	6— M10X20	Φ11
QUQ5	Φ280	Φ320	Φ295	Φ197	270	395	6— M12X20	Φ13


加油口 Filler Breather Filter

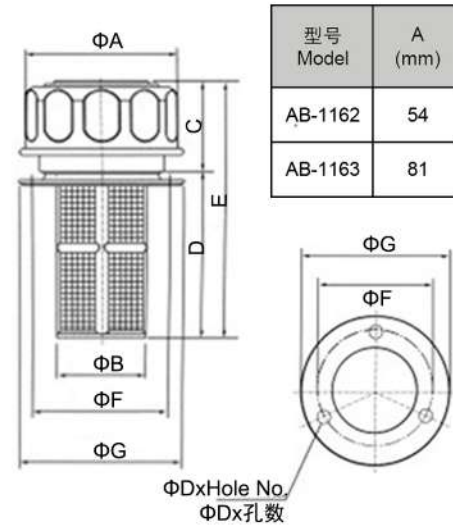

型号 Model	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	DX空数 Hole	过滤精度 Filtration mesh	重量 Weight (kg)
AB-1162	54	31	31	68	99	45.5	57	30	50	0.08
AB-1163	81	48	47	90	132	71	99	87	50	0.21



MF 型滤油网 MF Type Suction Filter

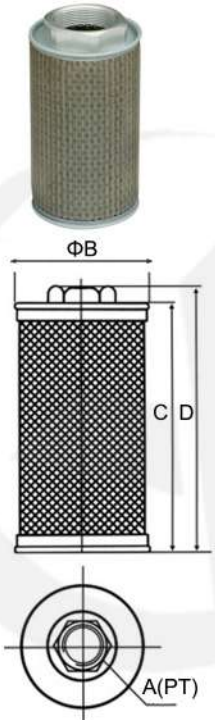

型号 Model	口径 A(PT)	B (mm)	C (mm)	D (mm)	流量 Flow (l/min)	过滤精度 Filtration mesh	重量 Weight (kg)
MF-02	1/4"	55	82	90	25	100	0.08
MF-03	3/8"	55	82	90	25		0.08
MF-04	1/2"	66	82	90	35		0.09
MF-06	3/4"	66	122	132	60		0.14
MF-08	1"	66	142	152	110		0.17
MF-10	1-1/4"	66	162	176	210		0.19
MF-12	1-1/2"	82	182	196	260		0.25
MF-16	2"	103	182	197	390		0.36
MF-20	2-1/2"	115	232	135	600		1.14
MF-24	3"	135	232	235	700		1.2
MF-32	4"	158	250	270	900		1.8

回油滤清器 Oil Filter



RFA		-100		x10		L		C			
型号Model		公称流量(L/min) Nominal flow		过滤精度(μm) Filtration Accuracy		出油口连接方式 Discharge Port Connection		发讯器 Indicator			
RFA微型直回式回油过滤器 RFA Tank mounted min-type return filter		25,40,63,100, 160,250,400, 630,800,1000		1,3,4,10,20,30		L: 出油口螺纹型 Thread Discharge Port F: 出油口法兰型 Flange Discharge Port		省略Omit: 无No Y: 带CYB-I型发讯器≤DC24V With CYB-I indicator C: 带CY-II型发讯器≤220V With CY-II indicator			
型号 Model	公称流量 (L/min) Nominal flow	过滤精度(μm) Filtration Accuracy	通径 Size	压力(Mpa) Pressure	压力损失 Press. loss 开启 Open 最大 Max		发讯装置 Indicator V A		重量 (Kg) Weight	滤芯型号 Model of element	
RFA-25x*L-	25	1 3 5 10 20 30	15	1.6	≤0.075	0.35	12 24 36 220	2.5 2 1.5 0.25	0.85	FAX-25x*	
RFA-40x*L-	40		20						0.9	FAX-40x*	
RFA-63x*L-	63		25						1.5	FAX-63x*	
RFA-100x*L-	100		32						1.7	FAX-100x*	
RFA-160x*L-	160		40						2.7	FAX-160x*	
RFA-250x*L-	250		50						4.35	FAX-250x*	
RFA-400x*L-	400		65						6.15	FAX-400x*	
RFA-630x*L-	630		90						8.2	FAX-630x*	
RFA-800x*L-	800		90						8.9	FAX-800x*	
RFA-1000x*L-	1000		90						9.96	FAX-1000x*	
SP		-06		x10		H					
型号		口径 Nom.Dia.		过滤精度 Filtration Accuracy (μm)		类型Type					
SP旋转式过滤器Spin-on Filter SPH过滤器滤头Filter Head SPX过滤器滤芯Element		06: Rc3/4 10: Rc 1¼		10μm 25μm		H: 回油过滤器 Oil return Filter J: 吸油过滤器 Oil Suction Filter					